


Rockfon® Artic™

Datasheet



Rockfon® Artic™





- Standard surface ideal for most common applications
- Good acoustic properties
- Affordable range of dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: nuanced white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Education
- Retail

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System
 A15	600 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™
 A24	600 x 600 x 15	2.0	50 / 100	Rockfon® System T24 A™
	1200 x 600 x 15	2.0	50 / 100	Rockfon® System XL T24 A™
 E15	600 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™
		2.2	100 / 100	Rockfon® System Ultraline E™
 E24	600 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™
		2.2	58 / 100	Rockfon® System XL T24 E™
		2.2	58 / 100	Rockfon® System T24 E™
	1200 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™

MS = Minimum Suspension




Performance



Sound absorption

α_w : 0.90 (Class A)

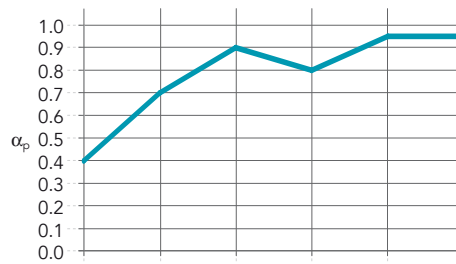

Thickness (mm) /
Suspension (incl. tile - mm)

125 Hz 250 Hz 500 Hz 1000 Hz 2000 Hz 4000 Hz

α_p

α_w

Absorption class

NRC

15 / 200	0.40	0.70	0.90	0.80	0.95	0.95	0.90	A	0.85
----------	------	------	------	------	------	------	------	---	------



Reaction to fire

A1



Light reflection

82 %



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/ON



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Fully recyclable



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low VOC emission products




Fire protection

The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.

Some sizes and edge details of Rockfon Artic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.

Rockfon® is a registered trademark
of the ROCKWOOL Group.

 twitter.com/RockfonUK

 linkedin.com/company/Rockfon-uk/

 instagram.com/Rockfon_official/

 youtube.com/RockfonUK

08.2018 | All colour codes mentioned are based on the NCS - Natural Colour System[®] property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



Rockfon
ROCKWOOL Limited T/A Rockfon
14th Floor, Chiswick Tower, 389 Chiswick High Road,
London W4 4AL
Tel: +44 (0) 208 222 7457
www.rockfon.co.uk