



# PRODUCT DATA SHEET

Expansion joint profile for dry lining  
to smooth  
Item no. 3750

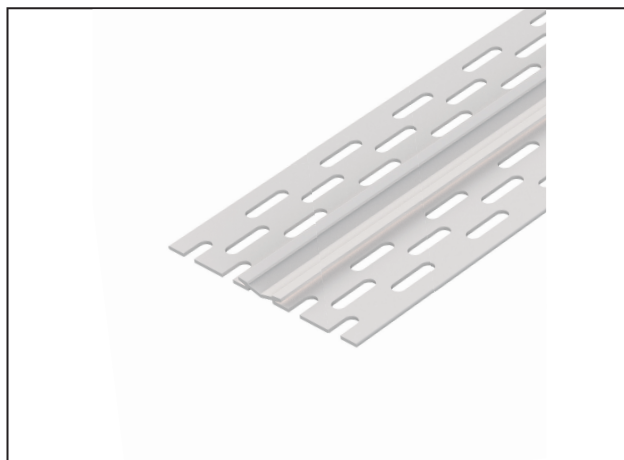

Status: 03.06.2025 | 12:06

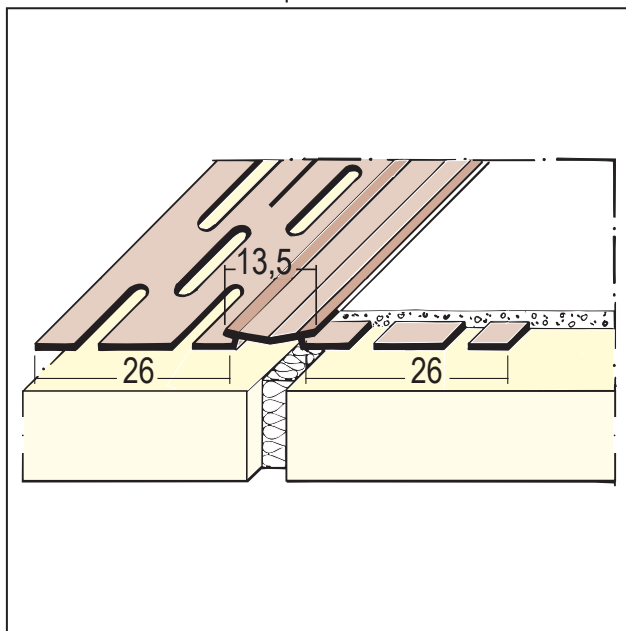

<b>Designation</b>	Expansion joint profile for dry lining to smooth
<b>Description</b>	<p>PROTEKTOR Movement joint profile made of PVC with soft PVC middle part for forming movement joints in the wall or ceiling area in accordance with the requirements of DIN 18181. Suitable for installation in surfaces as well as in inside corners.</p> <p>IMPORTANT! The PVC middle part can only be reworked with suitable coatings to a limited extent. Approval from the coating manufacturer is required.</p>
<b>Product area</b>	Internal construction
<b>Product category</b>	Filler profiles
<b>Plaster thickness</b>	1 mm
<b>Material</b>	Rigid PVC with soft PVC
<b>GK/Plate</b>	ab 8 mm
<b>Product length</b>	7500,000 cm
	13 mm
<b>Revision</b>	IMPORTANT! PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.
<b>Motion recording train / print</b>	+/-1,5 mm
<b>Productcolor</b>	10, white
<b>Treatment</b>	Secure the profile additionally with clips and apply adhesive to the entire surface on both sides up to the soft PVC centre section.
<b>Packaging Unit</b>	1 ROL / 120 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!