



PRODUCT DATA SHEET

Frameseal bead with shadow gap, mesh
6 mm
Item no. 37806

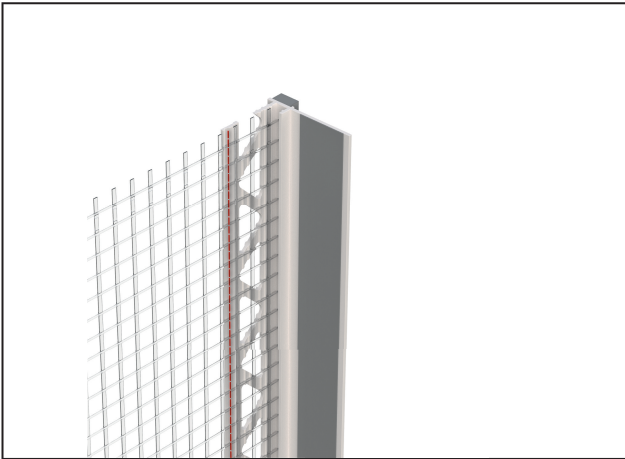

Status: 04.02.2025 | 11:02

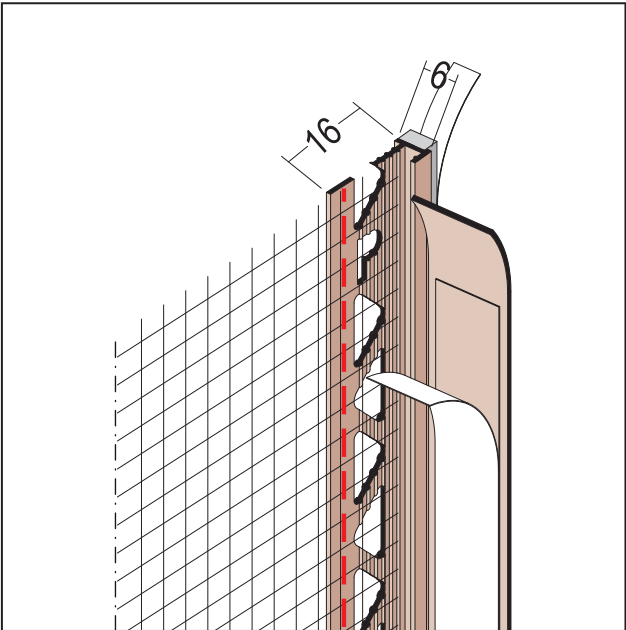

Designation	Frameseal bead with shadow gap, mesh 6 mm
Description	PROTEKTOR Self-adhesive white PVC window frame sealing bead with alkali-resistant fibreglass mesh, shadow joint and detachable adhesive tab for coverage foil. Self-adhesive, closed-cell foam tape. For heat insulation with 6-mm plaster thickness. With perforated plastering leg for high-strength bonding. Creates visually and technically perfect soffit connections. Test-certified resistance to air, wind and heavy rain.
Product area	Thermal insulation
Product category	Soffit profiles
Plaster thickness	6 mm
Material	Rigid PVC with glass fibre mesh
Product length	260 cm
Product width	6 mm
Air and component temperature	+5° bis +40°C
Grammage	160 g/m²
Mesh size	4 x 4 mm
Productcolor	10, white
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Bonding areas must be even, dry (note possible condensation), free of frost, dust, grease, solid and load-bearing. An adhesive test indicates whether the substrate is suitable for bonding or whether special measures (e.g. cleaning) are required.
Treatment	For underground with lightness value greater than 7.
Packaging Unit	50 PCS / 13 BOX
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 1050 Pa
Annotation	Single-sided mesh overlap of 10 cm from end of bar.

PRODUCT DATA SHEET

Frameseal bead with shadow gap, mesh

6 mm

Item no. 37806



Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse IC
Movement according to VDPM leaflet/SAF guideline	Klasse C
product line	BasicLine
Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit, geprüfte Bewegungsaufnahme. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.
Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Instruction sheet for association guidelines on connections to windows and shutters for plaster, thermal insulation composite systems and dry construction, published by the Association of Plasterers for Interiors and Facades.
connection joint	Shadow gap
Shadow gap	3 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!