

Rockfon® Industrial™ Opal

Datasheet



Rockfon® Industrial™ Opal

- Off white finish which can be used in their own right to create a ceiling or be placed behind other surfaces
- Low weight (4.0kg/m²), quick and easy to install
- Highest sound absorption (Class A)

Product Description

- Stone wool tile
- Visible side: pre-finished surface
- Rear side: back fleece

Application Areas

- Retail
- Industry

Edge	Module size	Weight	MS / MS easy access	Recommended
detail	(mm)	(kg/m²)	(mm)	installation System
A24	1200 x 600 x 50	4.0	50 / 200	Rockfon® System T24 A™

MS = Minimum Suspension




Performance



Sound absorption α_w : up to 1.00 (Class A)

aw. up to 1.00 (Class A)

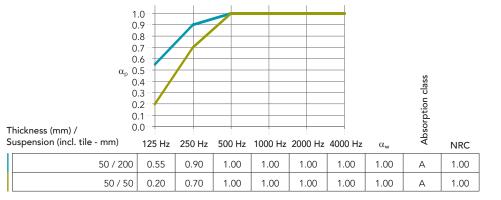



Reaction to fire

Α1



Light reflection

64%



Humidity and sag resistance

Up to 100% RH. No visible deflection in high humidity C/0N



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Environment

Fully recyclable stone wool

The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint

3.48 kg of CO2 eq. (cradle to gate based on EPD)



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products





Thermal insulation

Thermal conductivity: $\lambda_D = 37 \text{ mW/mK}$

Rockfon® is a registered trademark of the ROCKWOOL Group.

- in linkedin.com/company/Rockfon-as
- pinterest.com/Rockfon
- youtube.com/RockfonOfficial
- facebook.com/RockfonOfficial
- instagram.com/Rockfon_Official

Sounds Beautiful

